



RCTHW2-6 w/ standard RCTHW-PC and non-standard RCTHW-BASKET accessories



RCTHW2-3B

# HEATMAX Rectangular Heated Wells

RCTHW2-3 / -3B, RCTHW2-6 / -6B

Countertops & Built-Ins

## ◆ Features:

- Heat is evenly distributed throughout the unit to cook or hold foods at desired temperatures, and the insulated stainless steel design provides easy maintenance and durable performance.
- All units are equipped with an improved electronic control panel.
- RCTHW2 Series units are equipped with two high-powered heating elements for efficient, even heating.
- Autofill and Pasta Plate come standard on 6kw models.
- Temperature setting range: 40-95 °C .
- Timer setting for Heat mode.
- Switches from Heat to Hold mode automatically when timer is set





3kw models control



6kw models w/ auto-fill control

# HEATMAX Rectangular Heated Wells Models: RCTHW2 Series

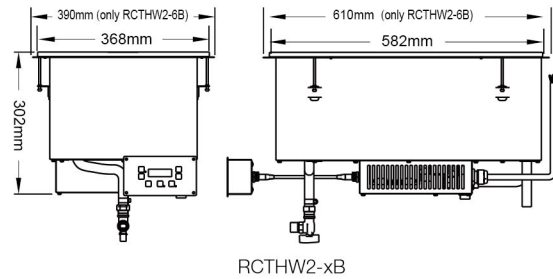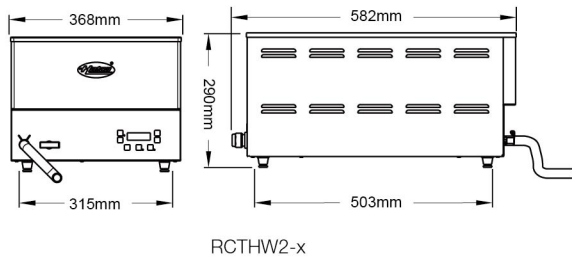

## SPECIFICATIONS HEATMAX Rectangular Heated Wells

Models	Voltage (V)	Power (W)	Amps (A)	Product Dimensions (W x D x H)	Ship Weight (kg)
RCTHW2-3	220-240	2520-3000	11.5-12.5	368*582*290	12
RCTHW2-3B				368*582*302	13
RCTHW2-6	220-240	5040-6000	23-25	368*582*290	14
RCTHW2-6B				390*610*302	15


\*Ship weight includes packaging.  
RCTHW2-6/6B models are available for 230/400V, three phase.

### Countertop models:


3kw shipped w/ 1830mm cord & plug.  
6kw shipped w/ 1830mm cord, auto-fill, overflow drain and a pasta cooker plate.

### Built-in models:

3kw shipped w/ 1830mm cord & plug, remote control box and a 2000 mm well to control box cable.  
6kw shipped w/ 1830mm cord, auto-fill, overflow drain, remote control box, a pasta cooker plate and a 2000 mm well to control box cable.

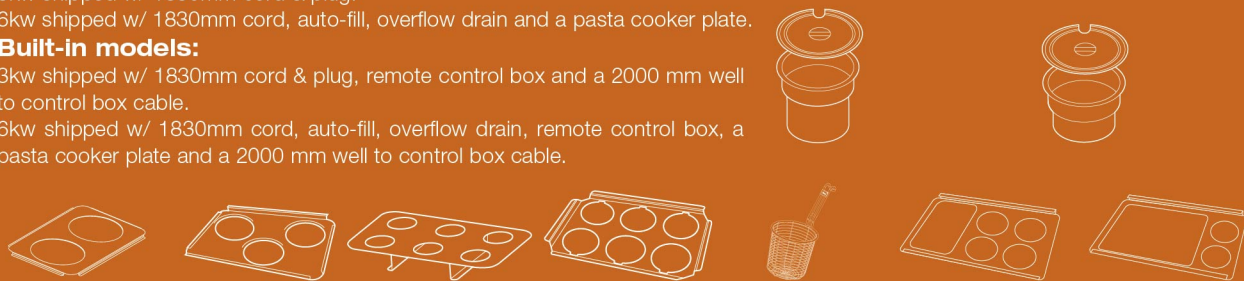

### RCTHW2-6B Countertop Cutout Dimensions Control Box Cutout Dimensions

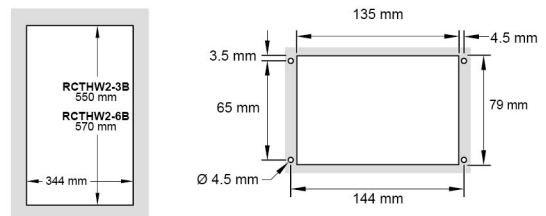

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com)